




Springpack Limited, Unit 1 Berkeley
Business Park, Wainwright Road
Worcester, WR4 9FA
Tel 01905 457 000
Email enquiries@springpack.co.uk
Visit www.springpack.co.uk

MASKING TAPE 4220

TECHNICAL DATA SHEET

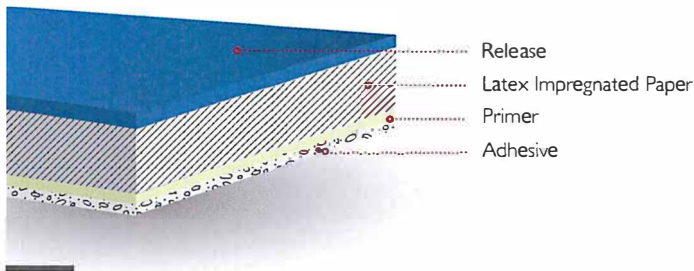

DESCRIPTION:

Saturated semi crepe paper masking tape coated with solvent based natural rubber adhesive. Suitable for all masking applications and light automotive use.


APPLICATIONS:

- General masking
- Spray painting (automotive use suitable but not recommended)
- Domestic DIY and Industrial general painting
- Holding sealing
- Fixing
- Light duty packaging

PROPERTIES:

- Residue free removal
- Excellent tape to tape adhesion
- Solvent and thinner resistant
- High initial tack
- Easy tear
- Excellent conformability
- Suitable for water and solvent based paints
- Easy curving
- Easy application on uneven surfaces

ALL ABOUT TAPES

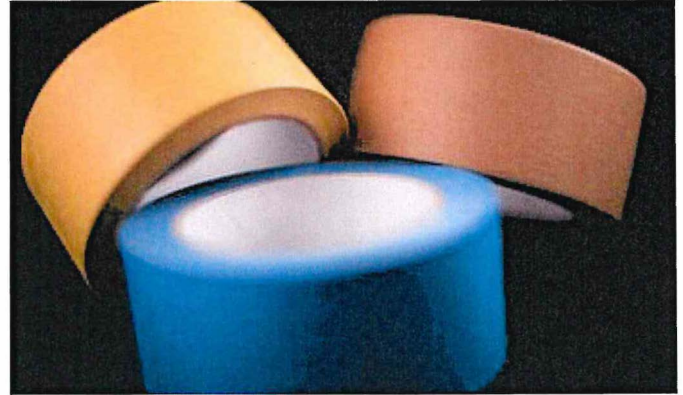

NOMINAL VALUES:

- Backing
Impregnated Crepe Paper

Adhesive
Solvent-based, Natural Rubber

Tensile Strength MD
 85 ± 20 (N/25mm)
TM 5004 by Afera

Elongation at Break MD
 8 ± 2 (%)
TM 5004 by Afera

Peel Adhesion on Stainless Steel
Over 3.0 (N/25mm)
TM 5001 by Afera

Paper thickness
 90 ± 15 (mic)

Total thickness
 105 ± 20 (mic)

Application Range
General purpose, Non oven automotive application

Paper Colors White Sharp Yellow

Adhesive Color Transparent

Effective: June 2017